


Detailblatt 24-902

Dämmung Dach 11-220: 180 + 80mm

Dämmung Wand 24-400: 60 + 120 + 60mm

Kriterium Oberflächenkondensat

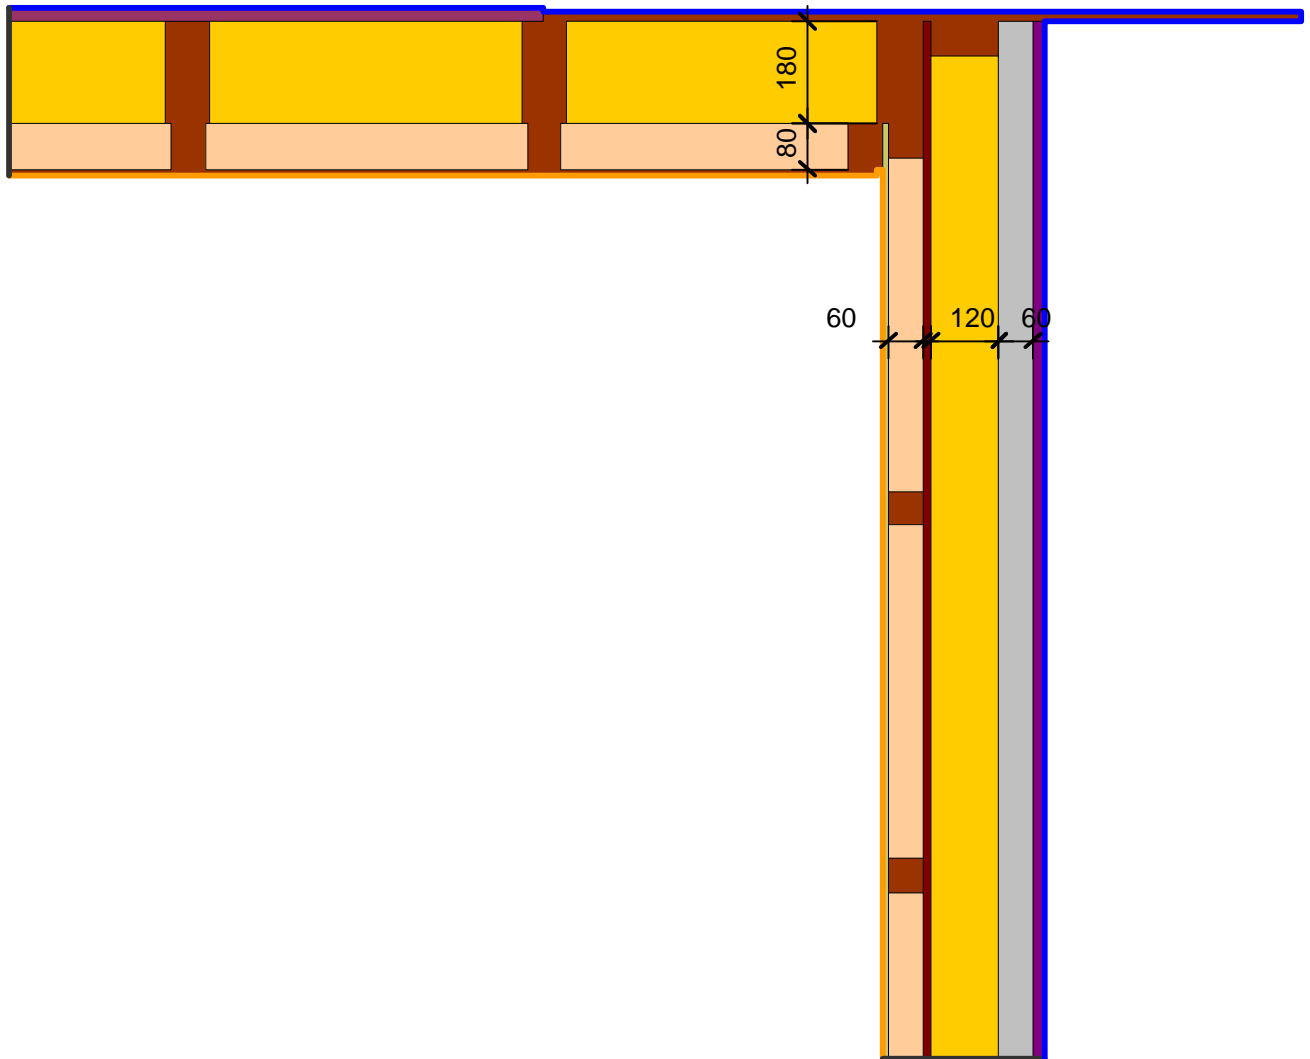



Material	λ [W/(m·K)]	Randbedingung	q [W/m ²]	θ [°C]	R [(m ² ·K)/W]	ε
Aussenputz	0.870	Aussen Standard	-14.600	20.000	0.040	
Fichte, Tanne	0.140	Innen Obere Raumhälfte	20.000		0.250	
Gips	0.400	Symmetrie/Bauteilschnitt	0.000			
Holzspanplatte 600	0.110					
ISOVER ISOCONFORT 032	0.032					
ISOVER ISOPONTE	0.032					
ISOVER SPARENPLATTE 032 PR	0.032					
Isorooft Natur	0.047					

ISOVER Bautechnik, August 2013

27.08.2013

D:\Data\Flixo-Dateien\Applica\Applica 2013\24-902 Dämmung Dach 180 + 80, Dämmung Wand 60 + 120 + 60, Kriterium Oberflächenkondensat.flx

Detailblatt 24-902
 Dämmung Dach 11-220: 180 + 80mm
 Dämmung Wand 24-400: 60 + 120 + 60mm
 Kriterium Oberflächenkondensat

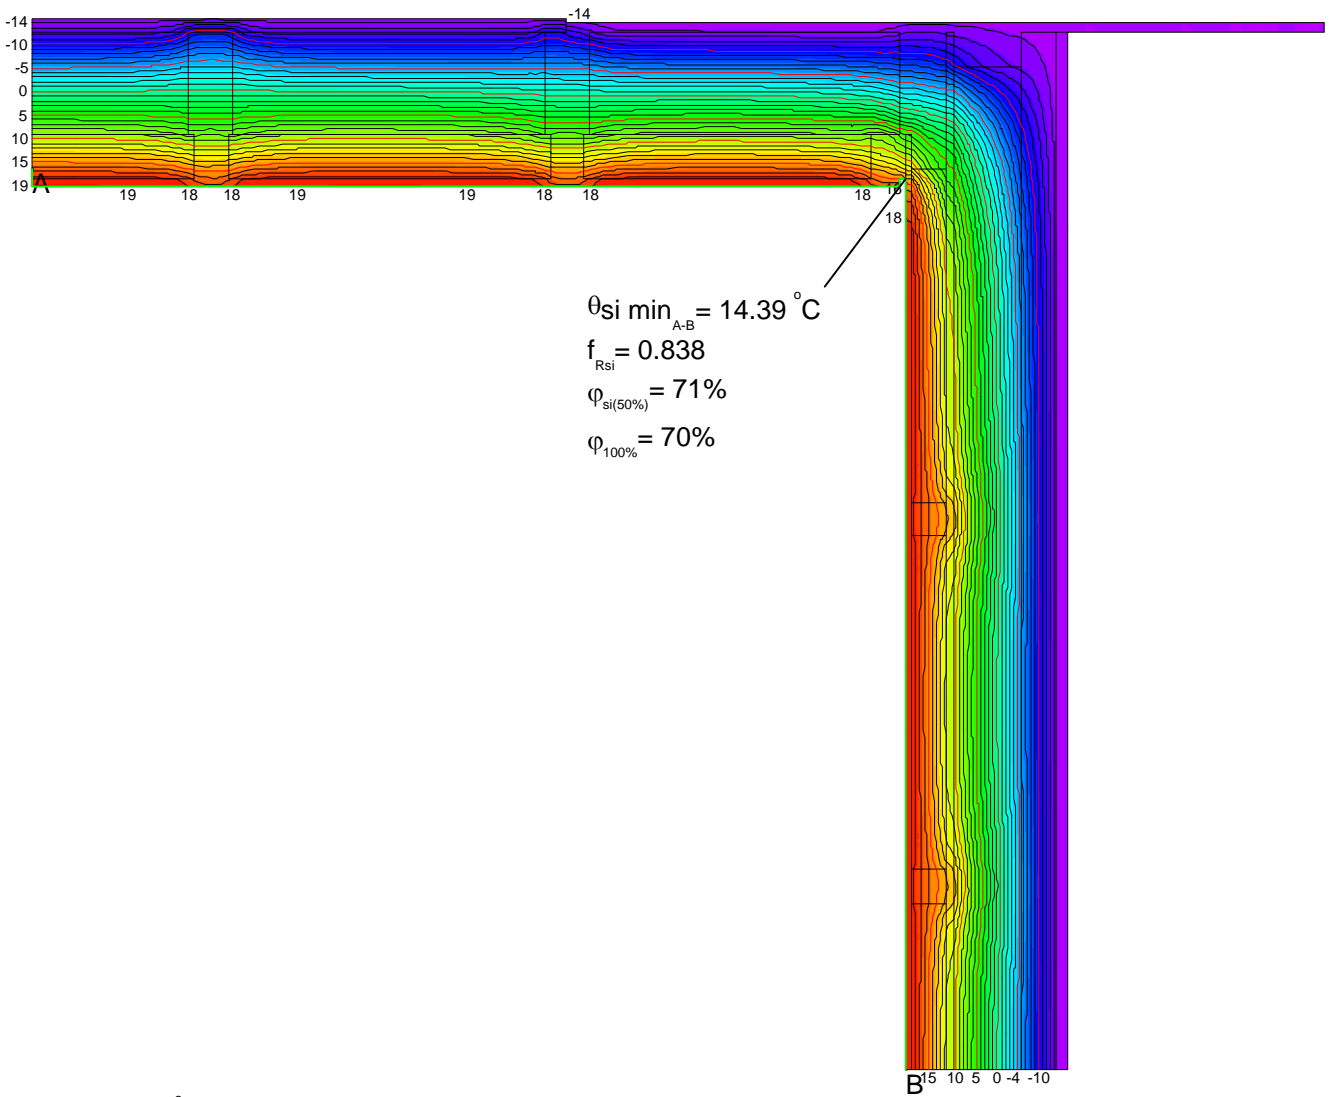

ISOVER Bautechnik, August 2013