


Detailblatt 24-905
 Dämmung Dach 11-220: 180 + 80mm
 Dämmung Wand 24-110: 60 + 120 + 60mm
 Kriterium Oberflächenkondensat


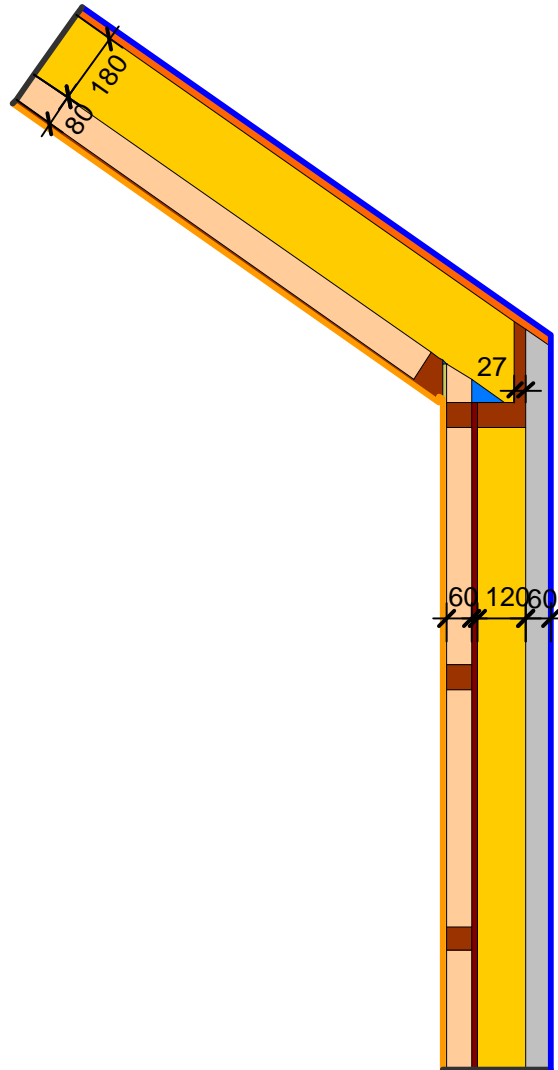


Material	λ [W/(m·K)]
Fichte, Tanne	0.140
Gips	0.400
Holzspanplatte 600	0.110
ISOVER ISOCONFORT 032	0.032
ISOVER ISOPONTE	0.032
ISOVER SPARENPLATTE 032 PR	0.032
Isorooft Natur	0.047
Unbelüftete Hohlräume	Eps=0.9/0.9

Randbedingung	q [W/m ²]	θ [°C]	R [(m ² ·K)/W]	ε
Aussen Standard		-14.600	0.040	
Innen Obere Raumhälfte		20.000	0.250	
Symmetrie/Bauteilschnitt	0.000			

ISOVER Bautechnik, August 2013

Detailblatt 24-905
Dämmung Dach 11-220: 180 + 80mm
Dämmung Wand 24-110: 60 + 120 + 60mm
Kriterium Oberflächenkondensat

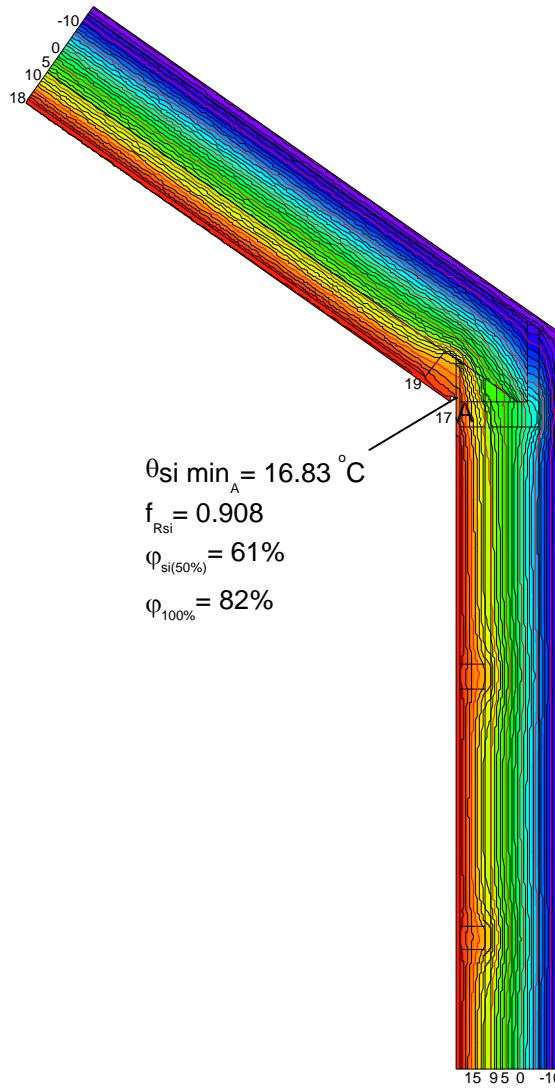

ISOVER Bautechnik, August 2013