


Detailblatt 24-927
Dämmung Wand 24-120: 60 + 120 + 60mm
Kriterium Schimmel

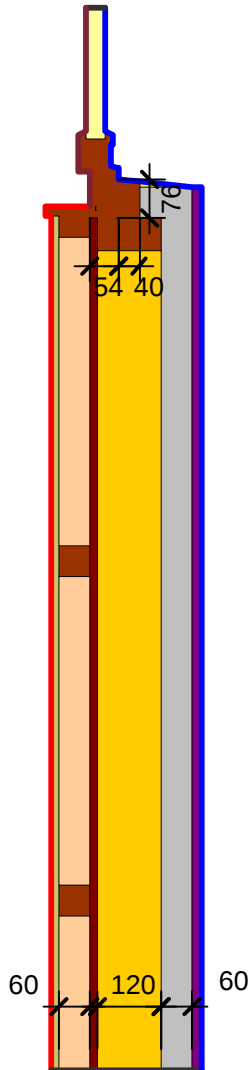


Material	λ [W/(m·K)]
Aussenputz	0.870
Fichte, Tanne	0.140
Gips	0.400
Holzspanplatte 600	0.110
ISOVER ISOCONFORT 032	0.032
ISOVER ISOLENE P	0.032
ISOVER ISOPONTE	0.032
ISOVER SPARRENPLATTE 032 PR	0.032
Maske	0.035
Unbelüftete Hohlräume	Eps=0.9/0.9

Randbedingung	q [W/m ²]	θ [°C]	R [(m ² ·K)/W]	ε
Aussen Standard		8.400		0.040
Innen Fenster/Türen		20.000		0.150
Innen Untere Raumhälfte		20.000		0.350
Symmetrie/Bauteilschnitt	0.000			

ISOVER Bautechnik, August 2013

Detailblatt 24-927
Dämmung Wand 24-120: 60 + 120 + 60mm
Kriterium Schimmel

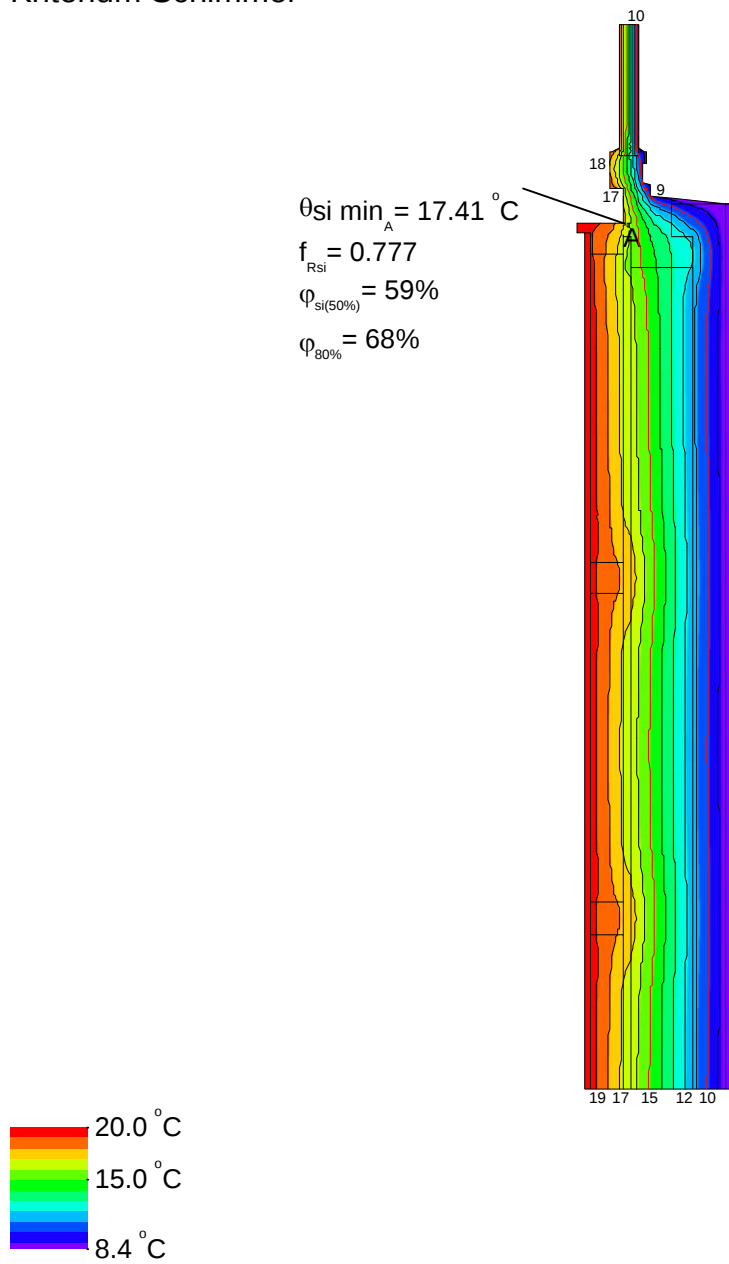

ISOVER Bautechnik, August 2013