


Detailblatt 11-925
 Dämmung Dach 11-220: 180 + 60mm
 Dachfenster unterer Anschluss

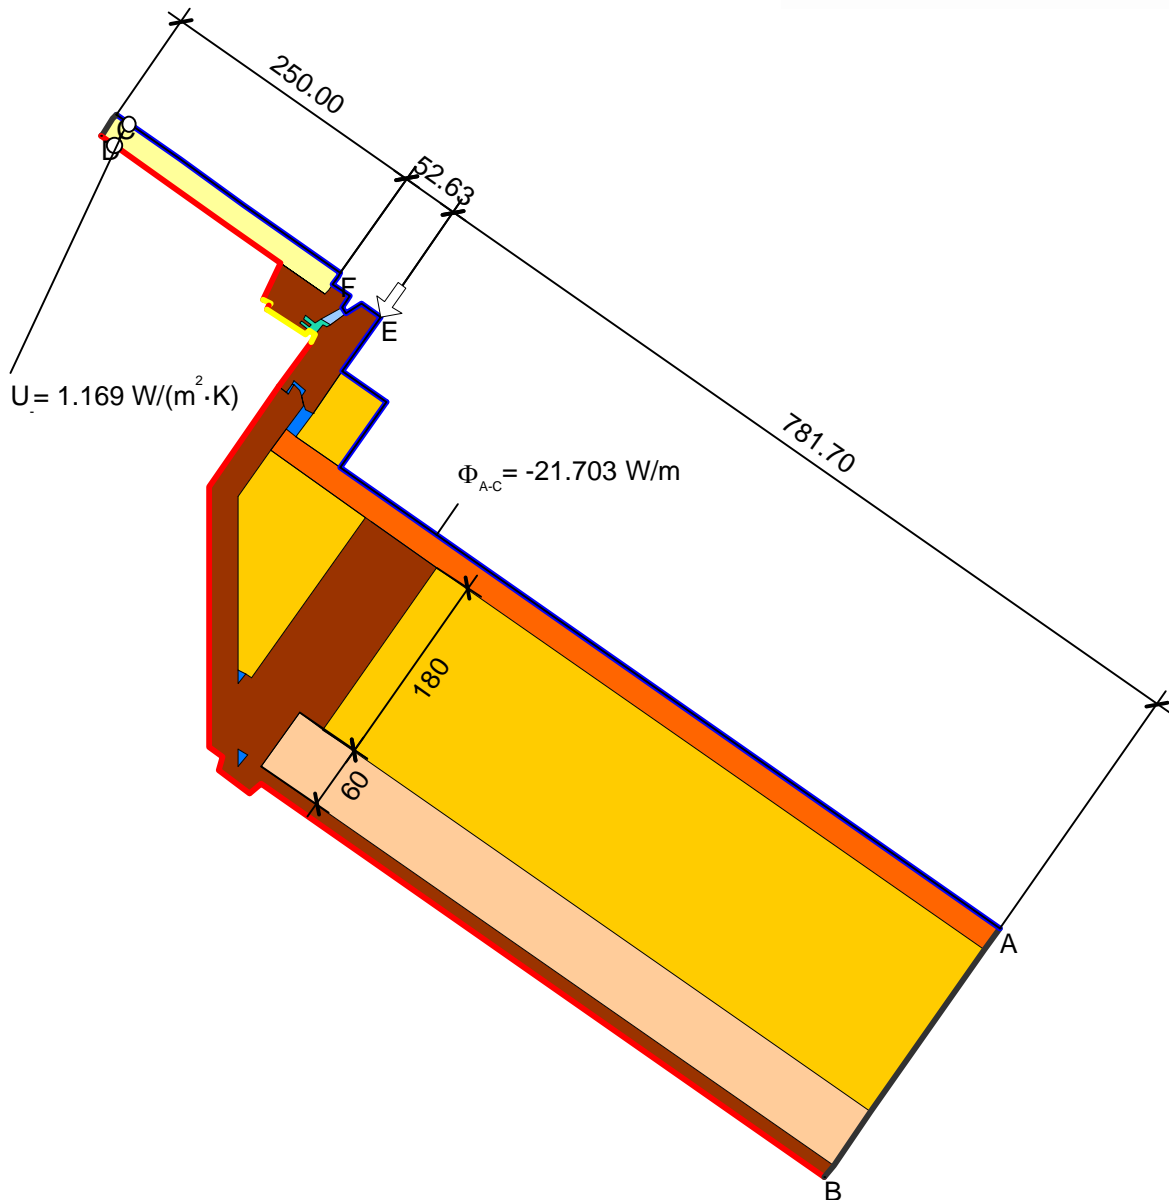


$$\Psi_{A-E-C,*} = \frac{\Phi}{\Delta T} - U_1 \cdot b_1 - U_2 \cdot b_2 - U_3 \cdot b_3 = \frac{21.703}{34.600} - 0.150 \cdot 0.782 - 1.169 \cdot 0.250 - 1.400 \cdot 0.053 = 0.14 \text{ W/(m}\cdot\text{K)}$$

Material	λ [W/(m·K)]	Randbedingung	q [W/m ²]	θ [°C]	R [(m ² ·K)/W]	ϵ
EPDM (Ethylen Propylen Dien Monomer)	0.250	Aussen Standard	-14.600	0.040		
Fichte, Tanne	0.140	Aussen stark belüftet	-14.600	0.130		
ISOVER PB M 032	0.032	Innen Fensterrahmen Reduziert	20.000	0.200		
ISOVER SPARRENPLATTE 032 PR	0.032	Innen Fensterrahmen Standard	20.000	0.130		
Isoroof Natur	0.047	Innen Wärmestrom aufwärts	20.000	0.100		
Leicht belüftete Hohlräume	Eps=0.9/0.9	Symmetrie/Bauteilschnitt	0.000			
Maske	0.035					
Unbelüftete Hohlräume	Eps=0.9/0.9					

ISOVER Bautechnik, November 2013

Detailblatt 11-925
Dämmung Dach 11-220: 180 + 60mm
Dachfenster unterer Anschluss

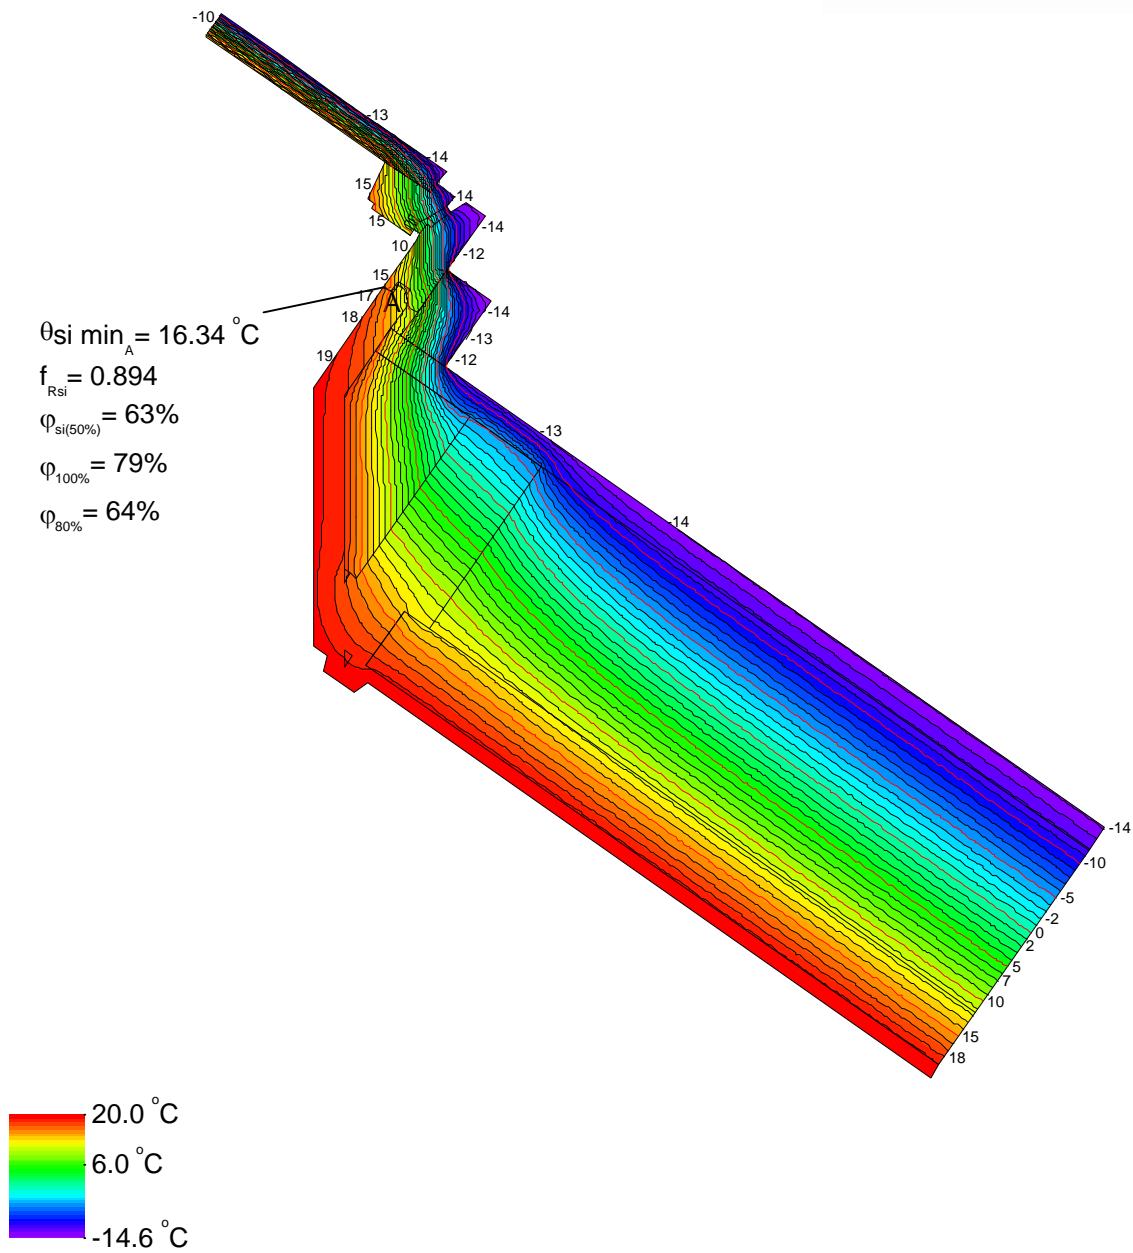

ISOVER Bautechnik, November 2013