




Detailblatt 24-906  
 Dämmung Dach 11-220: 180 + 80mm  
 Dämmung Wand 24-120: 60 + 120 + 60mm  
 Kriterium Oberflächenkondensat

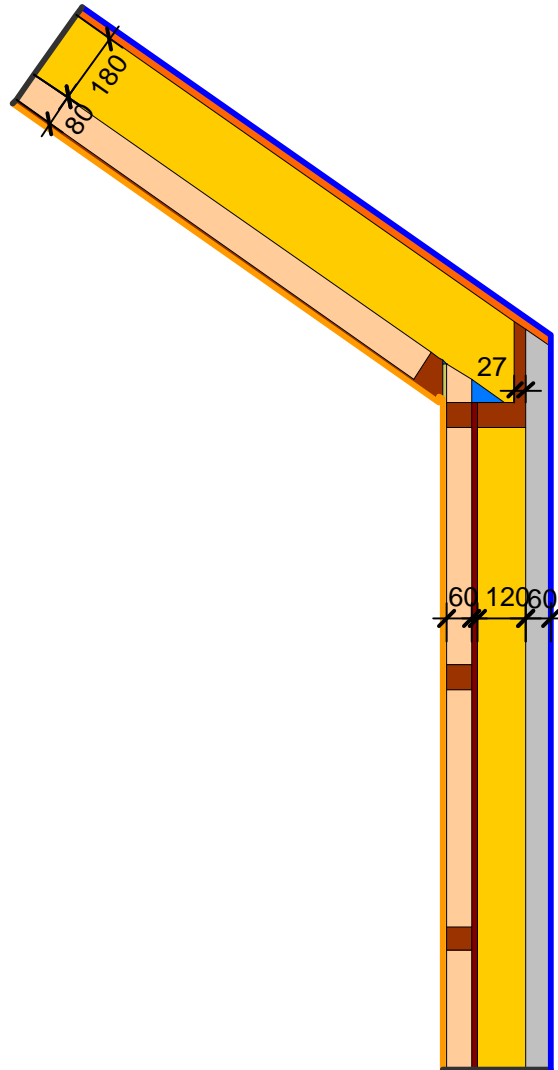

Material	$\lambda$ [W/(m·K)]	Randbedingung	$q$ [W/m <sup>2</sup> ]	$\theta$ [°C]	$R$ [(m <sup>2</sup> ·K)/W]	$\varepsilon$
Fichte, Tanne	0.140	Aussen Standard		-14.600	0.040	
Gips	0.400	Innen Obere Raumhälfte		20.000	0.250	
Holzspanplatte 600	0.110	Symmetrie/Bauteilschnitt	0.000			
ISOVER ISOCONFORT 032	0.032					
ISOVER ISOPONTE	0.032					
ISOVER SPARRENPLATTE 032 PR	0.032					
Isorooft Natur	0.047					
Unbelüftete Hohlräume	Eps=0.9/0.9					

ISOVER Bautechnik, August 2013

Detailblatt 24-906  
Dämmung Dach 11-220: 180 + 80mm  
Dämmung Wand 24-120: 60 + 120 + 60mm  
Kriterium Oberflächenkondensat

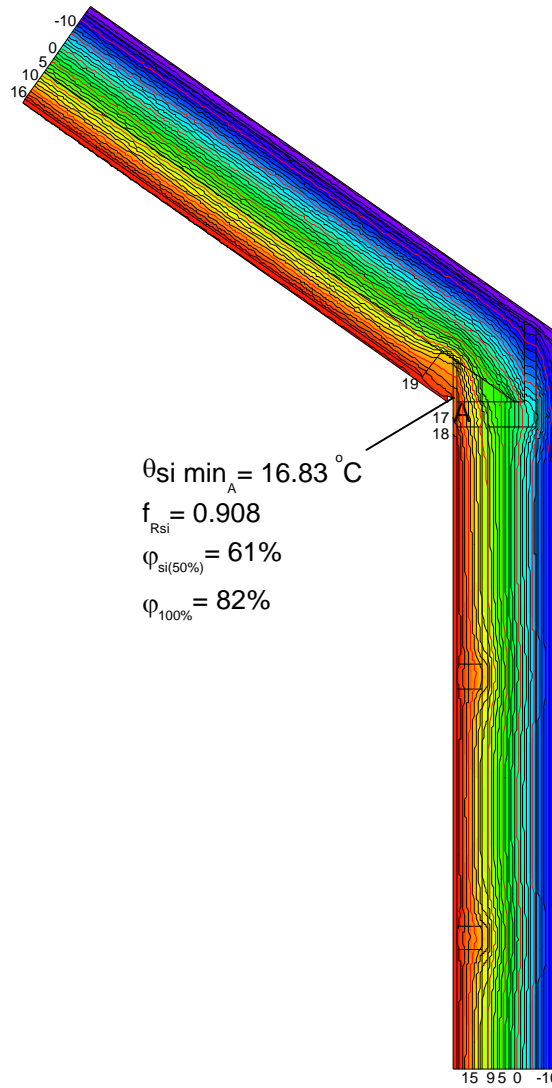

ISOVER Bautechnik, August 2013