



Detailblatt 24-920
 Dämmung Wand 24-110: 60 + 120 + 60mm
 Kriterium Oberflächenkondensat

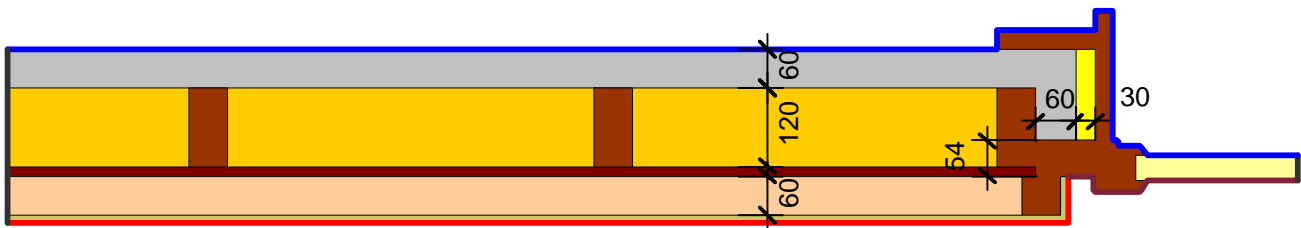

Material	λ [W/(m·K)]	Randbedingung	q [W/m ²]	θ [°C]	R [(m ² ·K)/W]	ϵ
Fichte, Tanne	0.140	Aussen Standard		-14.600	0.040	
Gips	0.400	Innen Fenster/Türen		20.000	0.150	
Holzspanplatte 600	0.110	Innen Untere Raumhälfte		20.000	0.350	
ISOVER ISOCONFORT 032	0.032	Symmetrie/Bauteilschnitt	0.000			
ISOVER ISOLENE P	0.032					
ISOVER ISOPONTE	0.032					
ISOVER SPARRENPLATTE 032 PR	0.032					
Maske	0.035					
Unbelüftete Hohlräume	Eps=0.9/0.9					

ISOVER Bautechnik, August 2013

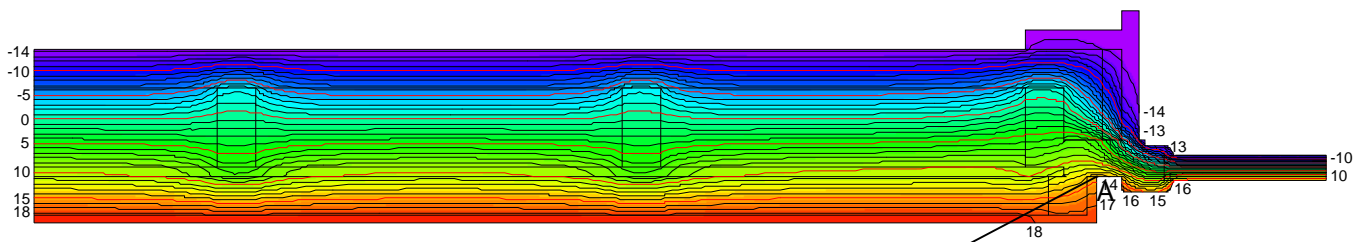

$$\theta_{si \min}_A = 14.32 \text{ } ^\circ\text{C}$$

$$f_{R_{si}} = 0.836$$

$$\varphi_{si(50\%)} = 72\%$$

$$\varphi_{100\%} = 70\%$$

