


Detailblatt 24-931  
 Dämmung Wand 24-120: 60 + 120 + 60mm  
 Kriterium Schimmel

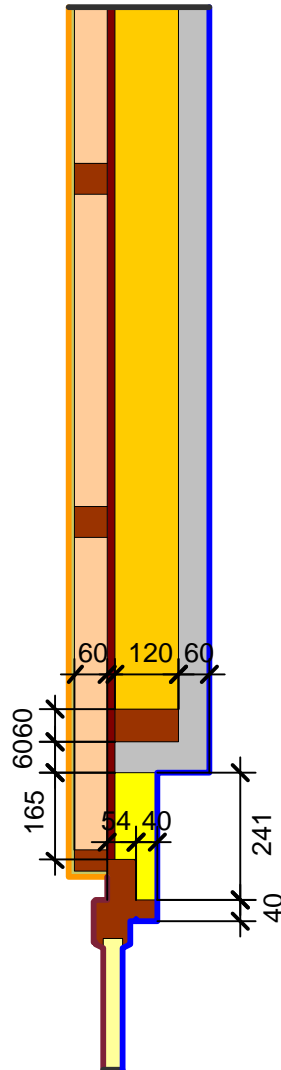

Material	$\lambda$ [W/(m·K)]
Fichte, Tanne	0.140
Gips	0.400
Holzspanplatte 600	0.110
ISOVER ISOCONFORT 032	0.032
ISOVER ISOLENE P	0.032
ISOVER ISOPONTE	0.032
ISOVER SPARRENPLATTE 032 PR	0.032
Maske	0.035
Unbelüftete Hohlräume	Eps=0.9/0.9

Randbedingung	$q$ [W/m <sup>2</sup> ]	$\theta$ [°C]	$R$ [(m <sup>2</sup> ·K)/W]	$\epsilon$
Aussen Standard	8.400		0.040	
Innen Fenster/Türen	20.000		0.150	
Innen Obere Raumbälfte	20.000		0.250	
Symmetrie/Bauteilschnitt	0.000			

ISOVER Bautechnik, August 2013

